



MÀTIX

USB Type A charger - 15 W
 USB Type A+A charger - 15 W
 USB Type A+C charger - 15 W
 USB Type C+C charger - 15 W


AM4191A
 AM4191AA
 AM4191AC
 AM4191CC




Type-A



Type-A+A



Type-A+C



Type-C+C

1. USE


For recharging portable devices such as phones, smartphones, MP3 or MP4, loudspeakers, watches, game consoles, powerbanks.

2. RANGE

Designation	Item
USB charger TYPE A - 1 module	<input type="checkbox"/> AM4191A
USB charger TYPE A + A - 1 module	<input type="checkbox"/> AM4191AA
USB charger TYPE A+C - 1 module	<input type="checkbox"/> AM4191AC
USB charger TYPE C + C - 1 module	<input type="checkbox"/> AM4191CC

Color code: ☐ White

3. OVERALL DIMENSIONS

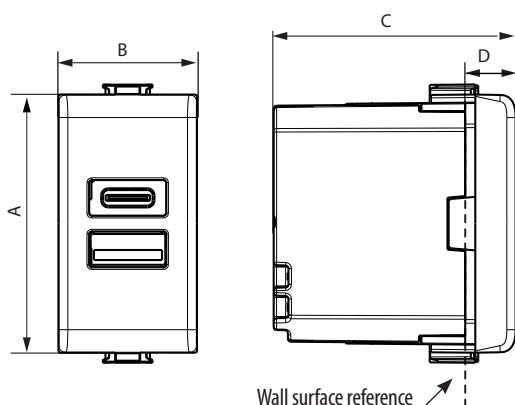

A	B	C	D
43.6	23.4	41	8.5

4. CONNECTION

Type of terminals: with screws

Terminal capacity: 1 x 2.5 mm²

Stripping length: 6 mm

Circuit Breaker: MAX. 16 A

Necessary safety precautions:



Switch OFF the power at the main circuit breaker.
 Make sure that the power is OFF before continuing with the installation.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04

Penetration by solid bodies/liquid: IP 40

■ 5.2 Material characteristics

Base: PC V-0 class

Cover: PC V-0 class

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.

650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

All values listed below are measured at an ambient temperature of + 20° and after 30 minutes of operation.

Nominal input voltage	100-240 V~
Nominal input frequency	50/60 Hz
Nominal input current	0.5 A
Nominal output current	3.0 A
Output power	15 W
Nominal output voltage	5.0 V=
Average efficiency in active mode	85 %
Stand-by power consumption	< 0.1 W
Consumption class without load and average level of efficiency: Level VI	
Protection class	II - Low voltage

Note: To optimize the charging time of your device, ensure turn it off during the charging phase.

■ 5.4 Climate characteristics

Storage temperature: -20°C to +70°C

Operating temperature: 5°C to +40°C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Caution: Always test before using other special cleaning products

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
 See e.catalogue