


## Livinglight Blanking module

N4950 - NT4950 - L4950

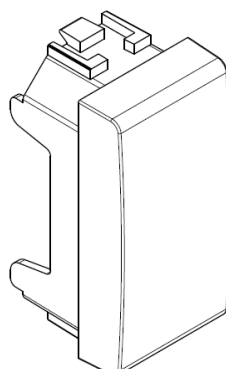

### Use

Blanking module


### Range

Designation	Item
Blank plate	<input type="checkbox"/> N4950
	<input type="checkbox"/> NT4950
	<input type="checkbox"/> L4950

Color code:

☐ White colour    ☐ Tech colour    ☐ Anthracite colour

### Overall dimensions (mm)

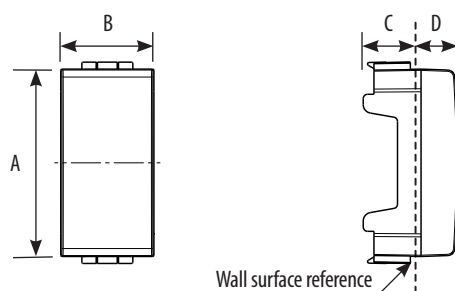

	A	B	C	D
..4950	44	22	11	11

### Connection

#### Technical characteristics

##### - Protection index

(considering a complete installation, including cover plate)

- Penetration by solid bodies/liquid: IP40

- Impact test: IK 04

##### - Material characteristics

Material: ABS

Halogen-free

UV resistant

Self-extinguishing: 650°C/30 s

##### - Climatic characteristics

Storage temperature: - 10° C to + 70° C

Use temperature: -5° C to + 35° C

### Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

**Caution:** Always test before using special cleaning products.

### Standards and approvals

Compliance with standards: IEC/EN 60669-1

Refer to e.catalogue.