


Livinglight Shutter switch

N4036N - NT4036N - L4036N

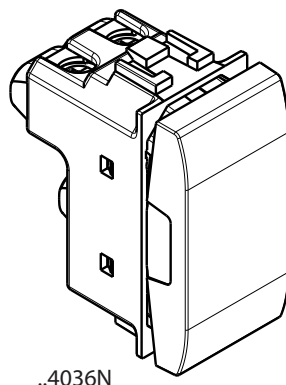

..4036N

Use

Shutter control device for lighting and other loads.


Range

Designation	Item
double push - interlocked	<input type="checkbox"/> N4036N
1 module	<input type="checkbox"/> NT4036N
	<input type="checkbox"/> L4036N

Color code:

☐ White colour ☐ Tech colour ☐ Anthracite colour

Overall dimensions (mm)

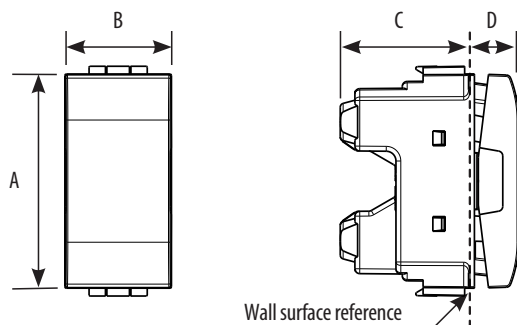

	A	B	C	D
..4036N	44	22	25.5	11

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 2,5 mm² max
Stripping length: 9 mm
Compatible with flexible or rigid cables

Technical characteristics

- Protection index

(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP40

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Case: PC (Polycarbonate)

Key cover: ABS – ABS/PC

Halogen free.

UV resistant.

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place

650° C / 30 s for other parts made of insulating materials

- Electrical characteristics

Voltage: 250 V a.c.

Current: 10 A

- Climatic characteristics

Storage temperature: - 10° C to + 70° C

Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.

Refer to e.catalogue.