


Double interlocked pushbutton



1. USE


Control devices for lighting and other loads.

2. RANGE

Designation	Cat. No.	Related Cover Code
Double pushbutton with interlock. 1P (NO) + 1P (NO) 10A - 250Va.c. 1 module	K4037N	<input type="checkbox"/> KW05 - KW05L <input type="checkbox"/> KM05 - KM05L <input type="checkbox"/> KG05 - KG05L

Colours code: White Sand Black

3. OVERALL DIMENSIONS (mm)

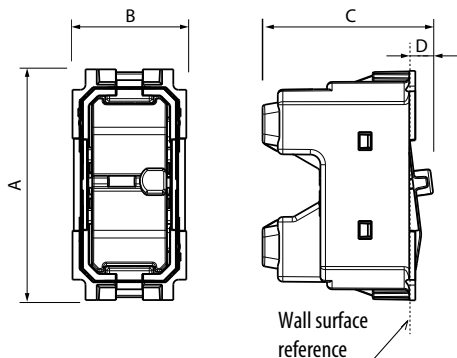

A	B	C	D
45,2	22,5	33,6	4,7

4. CONNECTION

Terminal type: screw clamp
Terminal capacity: 2 x 4 mm² max
Stripping length: 9 mm
Compatible with flexible or rigid cables

5. TECHNICAL CHARACTERISTICS

■ **5.1 Protection index**

Penetration by solid bodies/liquid: IP 20 D
Impact test: IK 04

■ **5.2 Material characteristics**

Material: Polycarbonate for mechanism case
Halogen free.
UV resistant.
Self-extinguishing:

- 850° C / 30 s for insulating parts holding live parts in place.
- 650° C / 30 s for other parts made of insulating materials.

■ **5.3 Electrical characteristics**

Voltage: 250 VAC
Current: 10A

■ **5.4 Climatic characteristics:**

Storage temperature: - 10° C to + 70° C
Use temperature: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards IEC/EN/CEI 60669-1.
Refer to e.catalogue.