


LIVINGLIGHT

Double lampholder for out of door signalization



Use

Double lampholder for out of door signalization, with symbols "do not disturb" and "make up the room"

Range

Designation

double lampholder with 2 diffusers: 1 red + 1 green - for 2 LED items LN4742V12T, LN4742V127T and LN4742V230T
1 module

Cat. Nos.


- N4373H
- NT4373H
- L4373H

Colors: White Tech Anthracite

Connection

Terminal type: screw
Terminal capacity: 1 x 2.5 mm² - 2 x 1.5 mm²
Stripping length: 7 mm
Screwdriver: 3 mm flat

Overall dimensions (mm)

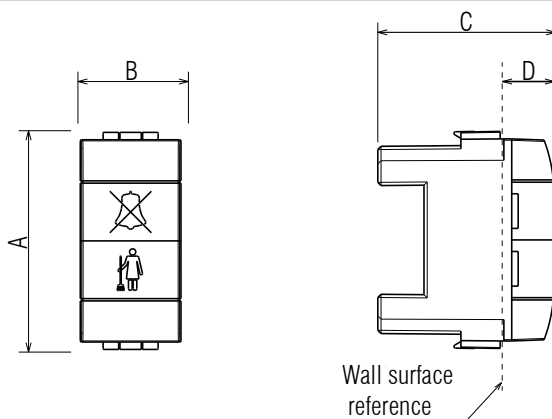

A	B	C	D
47	21,8	38	11,5

Technical characteristics

- Mechanical characteristics

Protection against impacts: IK 04
Protection against solid bodies/liquids: IP 20 assembled product

- Material characteristics

Mechanism casing: PC
Halogen-free
UV resistant

Self-extinguishing: + 850°C/30 s for insulating parts holding live parts in place.
+ 650°C/30 s for the other insulating components.

- Climate characteristics

Storage temperature: 0°C to +45°C
Usage temperature: +5°C to +45°C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliant with installation and manufacturing standards.
See e-catalogue.