


LIVING LIGHT
Socket outlet 2 P + E - 16 A

Cat. No(s): N4142 - NT4142 - L4142 - L4142AR - N4142AN - NT4142AN - L4142AN
 N4142AF - NT4142AF - L4142AF - LN4142AN - LN4142MA
 N4143 - NT4143 - L4143 - N4144 - NT4144 - L4144 - N4145 - NT4145 - L4145
 N4146 - NT4146 - L4146 - N4942N - NT4942N - L4942N - 40980






1. USE

16 A - 250 Vac Franco-Belge standard socket outlet.
 Mechanism supplied with front cover.
 Mechanism to be completed with cover plates and supports.
 Flush or wall mounting.

2. RANGE

	Designation	References
	2 P+E - 16 A - 250 Vac socket Shielded tulip contacts	<input type="checkbox"/> N4142 <input type="checkbox"/> NT4142 <input type="checkbox"/> L4142 <input type="checkbox"/> N4142AR
	2 P+E - 16 A - 250 Vac socket Shielded tulip contacts	<input type="checkbox"/> N4142AN <input type="checkbox"/> NT4142AN <input type="checkbox"/> L4142AN
	2 P+E - 16 A - 250 Vac socket Flat - Shielded tulip contacts	<input type="checkbox"/> N4142AF <input type="checkbox"/> NT4142AF <input type="checkbox"/> L4142AF
	2 P+E - 16 A - 250 Vac socket without front cover To be completed with front cover N4942N, NT4942N, L4942N	○ LN4142AN
	2 P+E - 16 A - 250 Vac socket without front cover Socket mounted on support To be completed with front cover N4942N, NF4942N, L4942N	○ LN4142MA
	2 P+E - 16 A - 250 Vac socket Shielded tulip contacts	<input type="checkbox"/> N4143 <input type="checkbox"/> NT4143 <input type="checkbox"/> L4143
	2 P+E - 16 A - 250 Vac socket Shielded tulip contacts With pilot light, with automatic clamps - 2 modules	<input type="checkbox"/> N4144 <input type="checkbox"/> NT4144 <input type="checkbox"/> L4144
	2 P+E - 16 A - 250 Vac socket Shielded tulip contacts With cover	<input type="checkbox"/> N4145 <input type="checkbox"/> NT4145 <input type="checkbox"/> L4145


2. RANGE (continued)

	Designation	References
	2 P+E - 16 A - 250 Vac socket Shielded tulip contacts with indexing slot.	<input type="checkbox"/> N4146 <input checked="" type="checkbox"/> NT4146 <input checked="" type="checkbox"/> L4146
	Front cover for sockets LN4142AN, LN4142MA	<input type="checkbox"/> N4942N <input checked="" type="checkbox"/> NT4942N <input checked="" type="checkbox"/> L4942N
	Coding with adhesive for mounting on plug socket 2 P+E	<input type="radio"/> 40980

Color code:

- White
- Tech
- Anthracite
- Red
- Neutral article

3. OVERALL DIMENSIONS (mm)

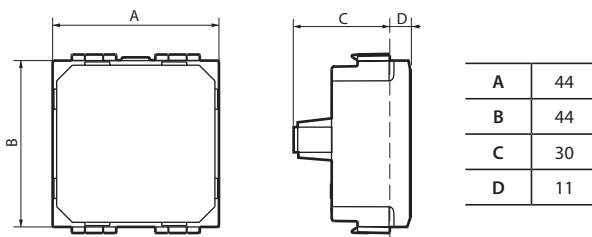

4. CONNECTION

Screw clamps:

Terminal capacities: 2.5 mm²

Stripping length: 9 mm

For Cat. Nos. N/NT/L4142AN - LN4142AN - LN4142MA :

Automatic clamps:

Terminal capacities: 2.5 mm²

Stripping length: 13 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

IP: 21

IK: 04

■ 5.2 Material characteristics

Satin appearance.

Material:

- Socket front cover: Polycarbonate
- Halogen free

Self extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

UV resistant.

■ 5.3 Electrical characteristics

Voltage: 250 VAC

Current: 16 A

■ 5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

Refer to e.catalogue.