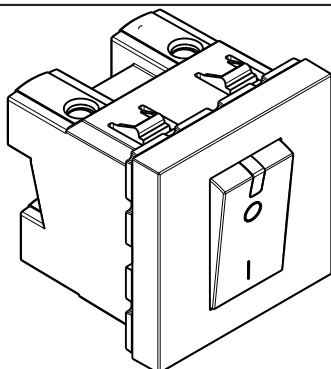



**switch 32A 2P**

**Use**

Control device for lighting and other loads.

**Range**

Designation	Item
32 A - 250 V a.c. 2 P switch with integrated red led, not replaceable 2 modules	<div>□ YW4011</div> <div>■ YG4011</div> <div>■ YD4011</div>

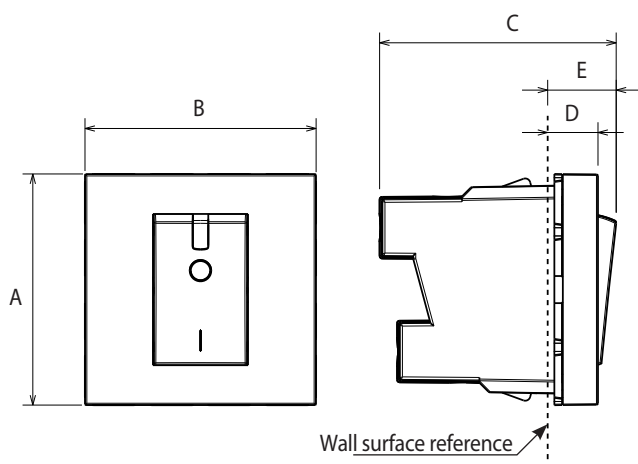**Colors:** □ White ■ Stone ■ Dark

**Overall dimensions (mm)**


A	B	C	D	E
45.1	45	46.2	8.6	12.3

**Connection**

Terminal type: screw clamp  
Terminal capacity: 2 x 4 mm<sup>2</sup> 1 x 6 mm<sup>2</sup> max  
Stripping length: 10 mm  
Compatible with flexible or rigid cables

**Technical characteristics**

- **Protection index:**  
(considering a complete installation, including cover plate)
  - Penetration by solid bodies/liquid: IP40
  - Impact test: IK04
- **Material characteristics:**
  - Case : PC
  - Key cover : ABS
  - Halogen Free
  - UV resistant
  - Self-extinguishing:  
850°C/30s for insulating parts holding live parts in place.  
650°C/30s for other parts made of insulating material.
- **Electrical characteristics:**
  - Voltage: 250 V a.c.
  - Current: 32A
- **Climatic characteristics:**
  - Storage temperature: -10° C to +70° C
  - Use temperature: -5° C to +35° C

**Cleaning**

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
**Caution: Always test before using special cleaning products.**

**Standards and approvals**

Conforme allo standard IEC/EN 60669-1, 2-2.  
Fare riferimento al catalogo online.