


2P+E + USB type C with PD 18W mixed socket outlet



Use

2 P+E socket outlets with child protection.


USB Type C socket: for recharging portable devices such as phones, smartphones, tablets, MP3, MP4, loudspeakers, watches, game consoles, powerbanks.

Range

Designation	Cat. Nos.	Related Cover code
Mixed socket composed of:		
- 2 P+E socket outlet - 16 A - 250 V~	<input type="checkbox"/> KW4140A16USB	<input type="checkbox"/> KW68
- single USB type C socket with PD 18W	<input type="checkbox"/> KM4140A16USB	<input type="checkbox"/> KM68
	<input type="checkbox"/> KG4140A16USB	<input type="checkbox"/> KG68

Colours code: ☐ White ☐ Sand ☐ Black

Overall dimensions (mm)

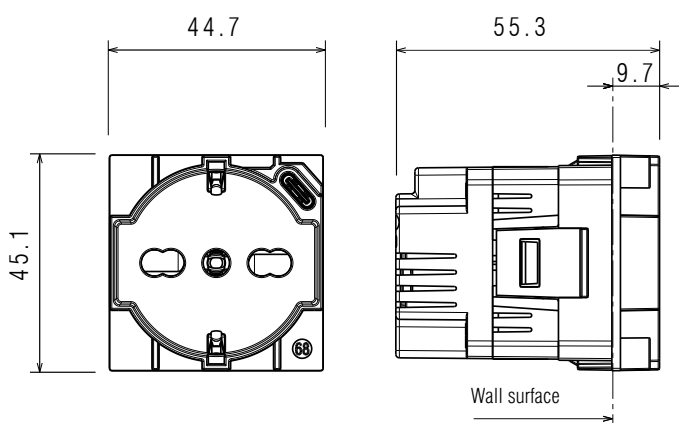

Connection

- **2 P+E socket outlet**
Terminal Type: screw
Terminal capacity: 2 x 2.5 mm²
Stripping length: 11 mm
Flexible or rigid cables compatible
- **Type C USB socket**
Prewired socket

Technical characteristics

- Mechanical characteristics

Protection against impact: IK 04

Protection against solid bodies and liquids: IP 20D

- Material characteristics

Mechanism casing: PC

Halogen free

UV resistant

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place

650° C / 30 s for other parts made of insulating materials.

- Electrical characteristics 2 P+E socket

Voltage: 250 V~

Current: 16 A

Frequency: 50/60 Hz

- Electrical characteristics USB socket

Integrated surge protection.

Power Delivery max 18W.

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Connector	USB Type C
Nominal input voltage	250 V~
Nominal input frequency	50-60 Hz
Nominal input current	90mA
Stand-by power consumption	0.05 W - 0.2 mA
Nominal output voltage	5 V=, 9V=, 12V=
Nominal output current	3.0 A, 2.0 A, 1.5 A
Efficiency can meet energy star level "VI" (≥ 76% measured at USB socket output side)	
Safety standard	EN62368-1
Protection class	II - Low voltage

- Climatic characteristics

Storage temperature: - 10° C to + 70° C

Use temperature: - 5° C to + 35° C

2P+E + USB type C with PD 18W mixed socket outlet

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

The plates must not be painted.

Standards and approvals

Compliant with installation and manufacturing standards.

See e-catalogue.