

Multi-sockets SLIM

 3636DB - 3636DBF – 3636DBU – 3659D
 3636GB - 3636GBF – 3636GBU – 3659G

Use

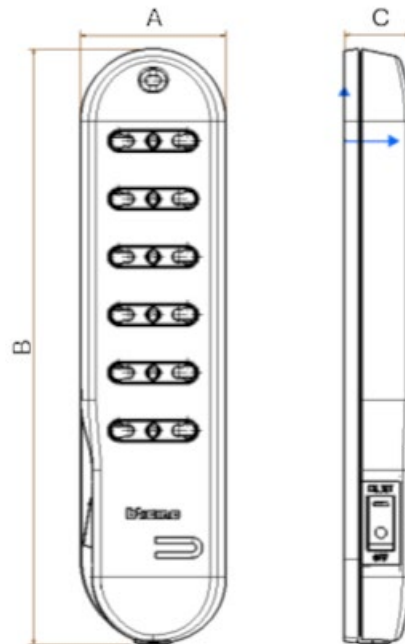
Multi outlet socket 10/16A 250V with safety switch.
To connect up to 6 Italian sockets.

Connection

Plug 10A Italian standard.
Socket 10/16A Italian standard

Range

ITEM	DESIGNATION
3636DB	Multi-socket with 6 sockets 2P+T (10/16A), SAFE switch, white
3636GB	Multi-socket with 6 sockets 2P+T (10/16A), SAFE switch, grey
3636DBF	Multi-socket with 6 sockets 2P+T (10/16A), lightning protection, SAFE switch, white
3636GBF	Multi-socket with 6 sockets 2P+T (10/16A), lightning protection, SAFE switch, grey
3636DBU	Multi-socket with 4 sockets 2P+T (10/16A), USB connectors type A 2.4A, SAFE switch, white
3636GBU	Multi-socket with 4 sockets 2P+T (10/16A), USB connectors type A 2.4A, SAFE switch, grey
3659D	Multi-socket with 6 sockets 2P+T (10/16A), without cable, white
3659G	Multi-socket with 6 sockets 2P+T (10/16A), without cable, grey

Dimension


A	B	C
55	226	25

Technical characteristics**Protection index**

Penetration by solid bodies/liquid: IP20.

Material characteristics:

Cover: Polypropilene.

Glow-wire performances:

850° C / 30 s for insulating parts holding live parts in place.

650° C / 30 s for other parts made of insulating materials.

Electrical characteristics:

Voltage: 250 V ~

Frequency: 50 / 60 Hz

Current: input 10A. (16A only for 3659x series).

Max power: 2500W (3500W only for 3659x series)

SAFE switch 10A 250V~

USB sockets type A – A, output 5V --, 2.4A, 12W max

SPD: Type2 – Uc 250V 50/60 Hz – Up 1kV – In 1kA – I_{max} 2kA

Climatic characteristics:

Storage temperature: -10° C to + 70° C

Use temperature: - 5° C to + 35° C.

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards:

CEI 23-50, CEI 23-124

IEC 60884-2.7

IEC 60884-3-1

CEI EN 61643-11

Refer to e. catalogue