

Multi-sockets ULTRASLIM

3630USD – 3631USD – 3631USDB – 3631USGB


Use

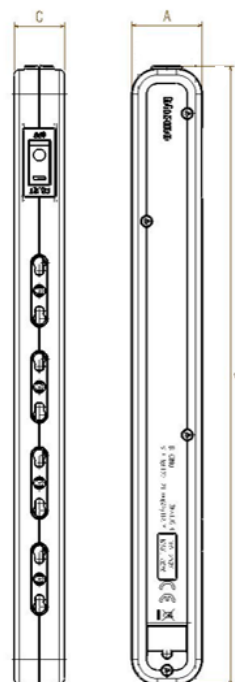
Multi outlet socket 10/16A 250V with SAFE switch
To connect up to 5 Italian sockets.

Connection

Plug 10A or 16A Italian standard.
Socket 10/16A Italian standard

Range

ITEM	DESIGNATION
3630USD	Multi-socket with 5 sockets 2P+T (10A), white.
3631USD	Multi-socket with 5 sockets 2P+T (10/16A), white.
3631USDB	Multi-socket with 4 sockets 2P+T (10/16A), SAFE switch, white.
3631USGB	Multi-socket with 4 sockets 2P+T (10/16A), SAFE switch, grey.

Dimension


A	B	C
33	290	23.5

Technical characteristics**Protection index**

Penetration by solid bodies/liquid: IP20.

Material characteristics:

Cover: Polypropilene.

Glow-wire performances:

850° C / 30 s for insulating parts holding live parts in place.

650° C / 30 s for other parts made of insulating materials.

Electrical characteristics:

Voltage: 250 V ~

Frequency: 50 / 60 Hz

Current: input 10A. (16A only for 3631USD series).

Max power: 2500W (3500W only for 3631USD series)

SAFE switch 10A 250V~

Climatic characteristics:

Storage temperature: -10° C to + 70° C

Use temperature: - 5° C to + 35° C.

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards:

CEI 23-50, CEI 23-124

IEC 60884-2.7

Refer to e.catalogue