

**Multi-sockets POKER**

 3682D – 3684DB – 3684DBF – 3684DBU – 3685D  
 3682G– 3684GB – 3684GBF – 3684GBU – 3685G

**Use**

Multi outlet socket 10/16A 250V with illuminated switch.

To connect up to 5 multi-standard sockets.

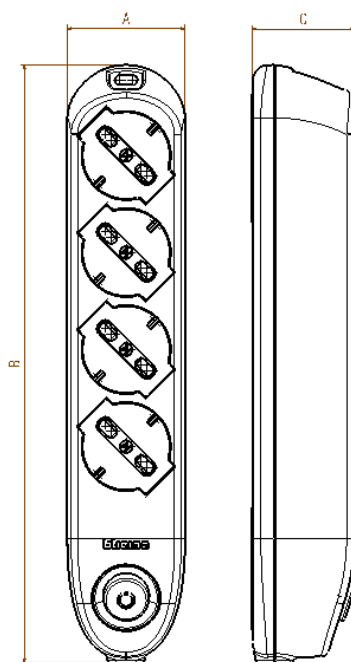
**Connection**

Plug 16A Italian standard.

Socket 10/16A multi-standard sockets.

**Range**

ITEM	DESIGNATION
3682D	Multi-socket with 5 sockets 2P+T (10/16A) multi-standard, without cable, white
3682G	Multi-socket with 5 sockets 2P+T (10/16A) multi-standard, without cable, grey
3684DB	Multi-socket with 4 sockets 2P+T (10/16A), multi-standard, switch, white
3684GB	Multi-socket with 4 sockets 2P+T (10/16A), multi-standard, switch, grey
3684DBF	Multi-socket with 4 sockets 2P+T (10/16A), multi-standard, switch, lightning protection, white
3684GBF	Multi-socket with 4 sockets 2P+T (10/16A), multi-standard, switch, lightning protection, grey
3684DBU	Multi-socket with 4 sockets 2P+T (10/16A), multi-standard, switch, USB connectors type A-C 3.0A, white
3684GBU	Multi-socket with 4 sockets 2P+T (10/16A), multi-standard, switch, USB connectors type A-C 3.0A, grey

**Dimension**


A	B	C
52	265	45

3685D	Multi-socket with 5 sockets 2P+T (10/16A) multi-standard, with cable, white
3685G	Multi-socket with 5 sockets 2P+T (10/16A) multi-standard, with cable, grey

## Technical characteristics

### Protection index

Penetration by solid bodies/liquid: IP20.

### Material characteristics:

Cover: Polypropylene.

Glow-wire performances:

850° C / 30 s for insulating parts holding live parts in place.

650° C / 30 s for other parts made of insulating materials.

### Electrical characteristics:

Voltage: 250 V ~

Frequency: 50 / 60 Hz

Current: input 16A.

Max power: 3500W

Switch with light

SPD: Type2 – Uc 250V 50/60 Hz – Up 1kV – In 1kA – I<sub>max</sub> 2kA

USB sockets type A – C, output 5V --, 3A, 15W max

### Climatic characteristics:

Storage temperature: -10° C to + 70° C

Use temperature: - 5° C to + 35° C.

## Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

## Standards and approvals

Compliance with standards:

CEI 23-50, CEI 23-124

CEI EN 61643-11

IEC 60884-2.7

IEC 60884-3-1

IEC 61643-11

Refer to e.catalogue