

Cable reel

S2615 – S2620 – S2625 – S2630



Use

Cable reel 16A 250V with a thermal cut-out.
To connect up to 4 multi-standard sockets.


Connection

Plug 16A Italian standard.
Socket 10/16A multi-standard sockets.

Range

ITEM	DESIGNATION
S2615	Cable reel with 4 sockets 2P+T (10/16A) multi-standard, with a thermal cut-out. cable length 15 meters, black
S2620	Cable reel with 4 sockets 2P+T (10/16A) multi-standard, with a thermal cut-out. cable length 20 meters, black
S2625	Cable reel with 4 sockets 2P+T (10/16A) multi-standard, with a thermal cut-out. cable length 25 meters, black
S2630	Cable reel with 4 sockets 2P+T (10/16A) multi-standard, with a thermal cut-out. cable length 30 meters, black

Dimension

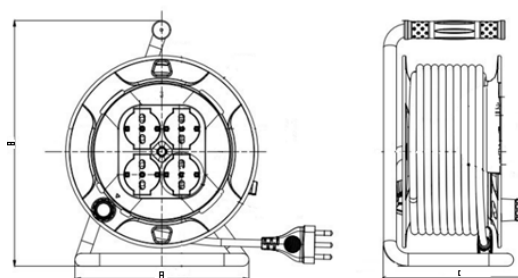

	A	B	C
S2615	190	268	155
S2620-25-30	215	314	163

Technical characteristics**Protection index**

Penetration by solid bodies/liquid: IP20.

Material characteristics:

Cover: Polypropylene.

Glow-wire performances:

850° C / 30 s for insulating parts holding live parts in place.

650° C / 30 s for other parts made of insulating materials.

Electrical characteristics:

Voltage: 250 V ~

Frequency: 50 / 60 Hz

Current: input 16A.

Max power wrapped cable: 1000W

Max power extended cable: 3000W

Thermal cut-out with non-automatic reset.

Climatic characteristics:

Storage temperature: -10° C to + 70° C

Use temperature: - 5° C to + 35° C.

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards:

CEI 23-50,

CEI EN 61242

Refer to e.catalogue