




K.4113



K.4180



K.4140A16



K.4140A16F

### 1. USE

Socket outlets: Italia standards, Italian and German standards.


### 2. RANGE

ITALIA STANDARD	Cat. Nos.	Related Cover code
2 P+E 10 A 250 Vac socket - centre distance 19 mm shielded tulip contact Ø 4 mm	<ul style="list-style-type: none"> <li>■ KS4113</li> <li>■ KB4113</li> <li>■ KC4113</li> </ul>	<ul style="list-style-type: none"> <li>■ KS02</li> <li>■ KB02</li> <li>■ KC02</li> </ul>
2 P+E 16 A 250 Vac socket - centre distance 19 mm and 26 mm - shielded tulip contacts - for plugs 2 P and 2 P+E 10 and 16 A	<ul style="list-style-type: none"> <li>■ KS4180</li> <li>■ KB4180</li> <li>■ KC4180</li> </ul>	<ul style="list-style-type: none"> <li>■ KS02</li> <li>■ KB02</li> <li>■ KC02</li> </ul>
ITALIAN AND GERMAN STANDARD	Cat. Nos.	Related Cover code
2 P+E 16 A 250 Vac socket - centre distance 19 mm and 26 mm in 2-centre configuration - protection tulip contacts; earth side contacts for German standards plugs; suitable for: 2 P and 2 P+E 10/16 A Italian standard plug, 2 P+E 16 A German standard plug	<ul style="list-style-type: none"> <li>■ KS4140A16</li> <li>■ KB4140A16</li> <li>■ KC4140A16</li> </ul>	<ul style="list-style-type: none"> <li>■ KS03</li> <li>■ KB03</li> <li>■ KC03</li> </ul>
2 P+E 16 A 250 Vac flat socket - centre distance 19 mm and 26 mm in 2-centre configuration - protection tulip contacts; earth side contacts for German standards plugs; suitable for: 2 P and 2 P+E 10/16 A Italian standard plug, 2 P+E 16 A German standard plug	<ul style="list-style-type: none"> <li>■ KS4140A16F</li> <li>■ KB4140A16F</li> <li>■ KC4140A16F</li> </ul>	<ul style="list-style-type: none"> <li>■ KS03</li> <li>■ KB03</li> <li>■ KC03</li> </ul>

#### Colours code:

- Steel
- Bronze
- Champagne

### 3. OVERALL DIMENSIONS (mm)

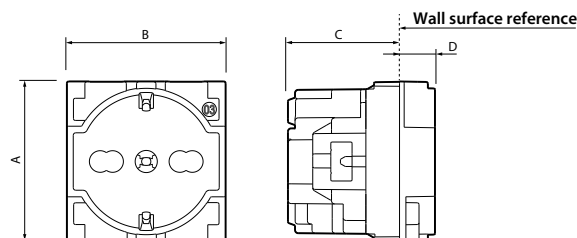

	A	B	C*	D*
1 module	45	22	28	10
2 modules	45	45	32	10

\* Average overall dimensions depending of the standard.

### 4. CONNECTION

#### Screw clamps:

Stripping length, rigid or flexible cables: 9 mm

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D

Impact test: IK 04

#### ■ 5.2 Material characteristics

Material: Polycarbonate

Colour: White, Sand, Black, Red

Halogen free.

UV resistant.

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.

+ 650° C / 30 s for other parts made of insulating materials.

#### ■ 5.3 Electrical characteristics

Voltage: 250 VAC

Current: 10 or 16 A

#### ■ 5.4 Climatic characteristics:

Storage and operating temperatures: - 5° C to + 35° C

## 6. CLEANING

Surface cleaning with a cloth.  
Do not use: acetone, tar remover, trichloroethylene.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

## 7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.  
Refer to e.catalogue.