

K.4033

Use


Cord pushbutton for lighting and other loads.

Range

Designation	Item	Related cover
Cord pushbutton 1P (NO/NC) 10A - 250Va.c. 1 module	☐ KW4033	☐ KW02
	☒ KG4033	☒ KG02
	☐ KM4033	☐ KM02
	☐ KS4033	☐ KS02
	☐ KB4033	☐ KB02
	☐ KC4033	☐ KC02

Colours code: ☐ White ☐ Steel
☒ Black ☐ Bronze
☐ Sand ☐ Champagne

Overall dimensions (mm)

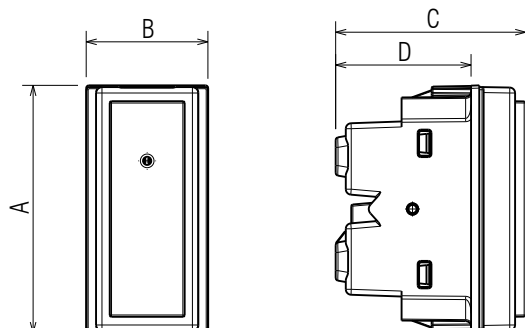

A	B	C	D
45.2	22.25	34.75	24.75

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 4 mm² max
Stripping length: 9 mm
Compatible with flexible or rigid cables

Technical characteristics

- **Protection index:**
(considering a complete installation, including cover plate)
 - Penetration by solid bodies/liquid: IP40
 - Impact test: IK04
- **Material characteristics:**
 - Case: PC (polycarbonate)
 - Key cover: ABS
 - Halogen Free
 - UV resistant
 - Self-extinguishing:
850°C/30s for insulating parts holding live parts in place.
650°C/30s for other parts made of insulating material.
- **Electrical characteristics:**
 - Voltage: 250 V a.c.
 - Current: 10A
- **Climatic characteristics:**
 - Storage temperature: -10° C a +70° C
 - Use temperature: -5° C a +35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN/CEI 60669-1.

Refer to e.catalogue.