



Socket outlet - US and EU/US sockets 2P+T



K4126



K4129

Use

Socket outlet - US and EU/US sockets 2P+T


Range

Designation	Item	Related cover
Socket EU-US 2P+T 16 A 250 V a.c. shielded holes	K4126	<input type="checkbox"/> KW60, KW60T
		<input checked="" type="checkbox"/> KG60, KG60T
		<input type="checkbox"/> KM60, KM60T
		<input type="checkbox"/> KS60, KS60T
		<input type="checkbox"/> KB60, KB60T
		<input type="checkbox"/> KC60, KC60T
Socket US 2P+T 16 A 127/250 V a.c. shielded holes	K4129	<input type="checkbox"/> KW61
		<input checked="" type="checkbox"/> KG61
		<input type="checkbox"/> KM61
		<input type="checkbox"/> KS61
		<input type="checkbox"/> KB61
		<input type="checkbox"/> KC61

Colours code:

<input type="checkbox"/> White	<input type="checkbox"/> Steel
<input checked="" type="checkbox"/> Black	<input type="checkbox"/> Bronze
<input type="checkbox"/> Sand	<input type="checkbox"/> Champagne

Overall dimensions (mm)

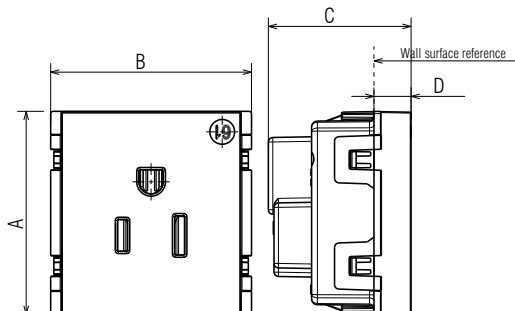

	A	B	C	D
K4126	45.1	44.6	31.7	8.2
K4129	45.1	44.6	31.7	8.2

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 4 mm² max
Stripping length: 11 mm
Compatible with flexible or rigid cables

Technical characteristics

- Protection index

(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP20D considering complete installation

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Material:
Case and Key cover: PC (Polycarbonate)
Halogen free.
UV resistant.

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place
650° C / 30 s for other parts made of insulating materials

- Electrical characteristics

Voltage: 127/250 VAC
Current: 16 A

- Climatic characteristics

Storage temperature: - 10° C to + 70° C
Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC 60884-1
Refer to e.catalogue.