


MatixGo

JW4084 - JG4084 - JB4084

- Axial pushbutton NO/NC



..4084

Use

Rocker control device for lighting and other loads.

Range

Designation

Item


Push button NO/NC axial 1P 10A - 250Va.c.
lightable with led lamp (see table below)
1 module

- JW4084
- JG4084
- JB4084

LED Color	230 Va.c.	12/24 Va.c.	127 Va.c.
White	LN4743/230T	LN4743/12T	LN4743/127T
Blue	H4743/230B	H4743/12B	H4743/127B

Colors: White Grey Black

Overall dimensions (mm)

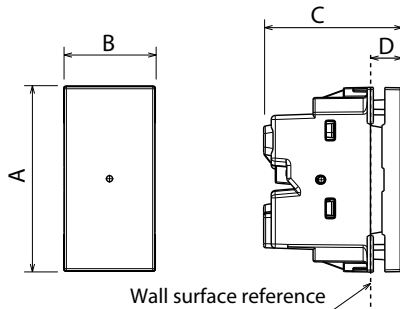

	A	B	C	D
..4084	45.1	22.3	33.8	7.6

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 4 mm² max
Stripping length: 9 mm
Compatible with flexible or rigid cables

Technical characteristics

- **Protection index:**
(considering a complete installation, including cover plate)

- Penetration by solid bodies/liquid: IP40
- Impact test: IK04

- **Material characteristics:**

- Case: PC (polycarbonate)
- Key cover: ABS
- Halogen Free
- UV resistant
- Self-extinguishing:

850°C/30s for insulating parts holding live parts in place.
650°C/30s for other parts made of insulating material.

- **Electrical characteristics:**

- Voltage: 250 V a.c.
- Current: 10A for ..4084

- **Climatic characteristics:**

- Storage temperature: -10° C a +70° C
- Use temperature: -5° C a +35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.

Refer to e.catalogue.