




502EF



503EF



504EF



506EF

**Use**

Full flush installation accessory for Living NOW range for masonry applications. Installation must be completed with masonry wall box for , support,plate and devices.

**Range**


Designation	Cat. Nos.
2 modules full flush installation accessory	■ 502EF
3 modules full flush installation accessory	■ 503EF
4 modules full flush installation accessory	■ 504EF
6 modules full flush installation accessory	■ 506EF

Colours code: ■ Grey

**Technical characteristics**

- **Protection index**
  - considering a complete installation, penetration by solid bodies/liquid: IP40
- **Mechanical characteristics**
  - Impact test: IK 08
- **Material characteristics**
  - Materials:
    - Accessory body: blend PC-ABS
    - Protection cover: ABS
  - UV resistant.
  - Halogen free.
  - Self-extinguishing: 750° C / 30 s
- **Climatic characteristics**
  - Storage temperature: - 10° C to + 70° C
  - Use temperature: - 5° C to + 35° C

**Overall dimensions (mm)**

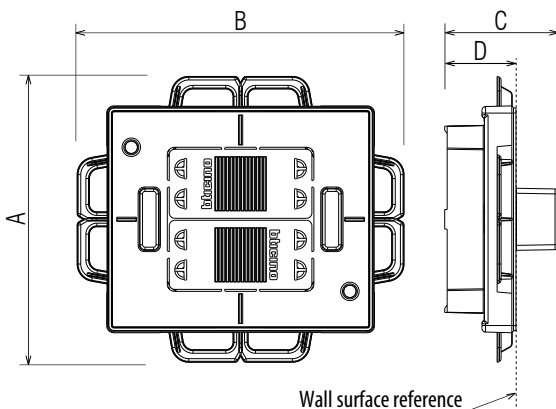

	A	B	C	D
502EF	115	131,5	45,4	28,7
503EF	115	154	51,9	35,2
504EF	115	176,5	51,9	35,2
506EF	115	221,7	52,9	36,2

**Standards and approvals**

Compliance with standards IEC CEI EN 60670-1  
Refer to e.catalogue.

**Cleaning**

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

**Caution: Always test before using special cleaning products.**